
LUMILY LED.
Bright ideas for big projects

Technical Bulletin No: **008**



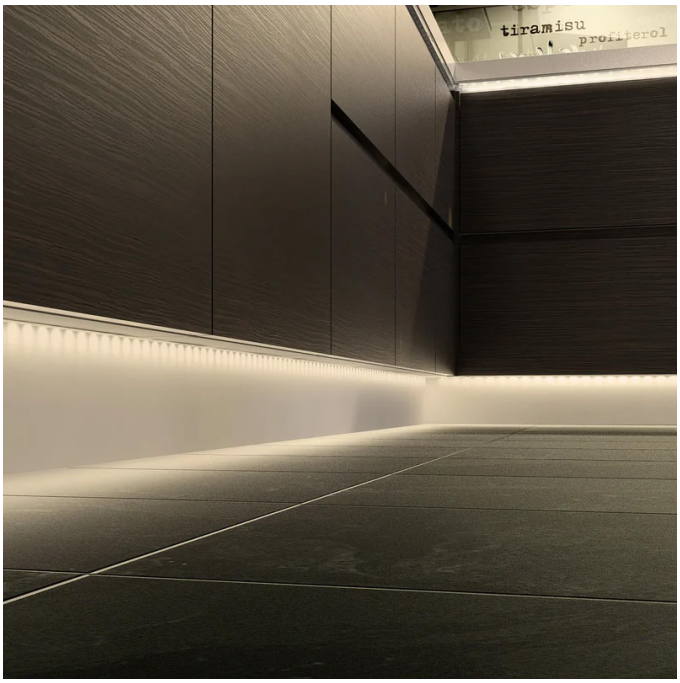

PEAK

ThePeak is a great value LED flexible strip, ideal for use in multiple applications across the kitchen, and perfectly matched to our range of profiles.

Supplied with two pre-soldered driver connection cables at each end, the strip is ready to plug and play out of the packet, and a wide range of accessories ensures that cut sections can be utilised in plethora of different ways.

BENEFITS
• LED Technology for long life
• Energy saving (good Lumens per watt ratio)
• Easy to install
• Suitable for multiple applications across the kitchen
• More flexibility and versatility
• Pairs perfectly with Lumily universal profiles

KEY FEATURES
• Pre-soldered 2.5M driver connection cables at each end of the strip
• VHB (Very high bond) adhesive tape
• Cut sections can be re-used with a wide range of accessories
• High colour rendering index: >90

TECHNICAL SPECIFICATION	
Wattage	3.6W/m
Voltage	24V
Lumens (Light output)	Warm White: 405lm
	Natural White: 440lm
	Cool White: 420lm
Colour rendering index	≥90
Beam angle	120°
Colour Temperature	Warm White: 3000 Kelvin
	Natural White: 4000 Kelvin
	Cool White: 5000 Kelvin
Number of LED's per meter	60
Operating Temperature	0°C ~ + 55°C

RoHS CE UK CA

LUMiLY LED.
Bright ideas for big projects

Technical Bulletin No: **008**





PRODUCT NAME	ORDER CODE	BARCODE
Peak - CW - 5M	LLS001	5065027455009
Peak - WW - 5M	LLS002	5065027455016
Peak - NW - 5M	LLS028	5065027455818
ACCESSORIES		
Peak -Driver Connector Cable - 2.5m Acc	LLA001	5065027455023
Peak -Inter Connecting Cable 1.5m - Acc	LLA002	5065027455030
Peak- Interconnecting Clip Acc	LLA003	5065027455047
Peak - Corner Connector - 50mm Acc	LLA004	5065027455054

MECHANICAL SPECIFICATION

PRODUCT NAME	DIMENSIONS (mm)	IP RATING
Peak - CW - 5M	L 5000mm x W 8mm x D 1.75mm	IP20
Peak - WW - 5M	L 5000mm x W 8mm x D 1.75mm	IP20
Peak - NW - 5M	L 5000mm x W 8mm x D 1.75mm	IP20

RoHS CE UK CA